



Design Medley II combines a mixture of textural overlaid framework grids that interweave and create gradual color changes across the pattern for unique and mergeable installations. Design Medley II features six unique multi-colorations inspired by nature's raw beauty, offering beautiful aesthetics that deliver versatility and functionality in order to adapt to today's design trends in commercial interior spaces. With mergeable dyelot carpet tile from Aladdin Commercial, you can now confidently replace worn out carpet tiles without effecting the look of your spaces. Carpet tile is great for high traffic areas that require periodic tile replacement due to staining and/or general wear and tear. Design Medley II and the Rediscovery Collection allow mergeability of various dyelots. To achieve desired results, it is important to follow the instructions for either new or replacement installations.

- Able to install tiles from multiple dyelots
- Minimizes need to purchase large quantities of attic stock
- Easy replacement of tiles
- Readily available for future renovation or expansion
- Multi-Directional install method recommended for optimal results

Walk All Over Tile

- Extends the life and appearance of interior floor
- Traps excess moisture and dirt at the entrance.
- Enhanced safety against slip and falls.
- Decreased maintenance cost over time.

# WalkOff Entryway System

Walked in soil and moisture are the main causes of premature wear and eventual replacement of flooring interiors. Effective placement of Aladdin's walkoff carpet tiles can reduce the amount of soil and moisture entering a facility by up to 91%. This means lowered maintenance costs and extended life for all floor coverings beyond the entry.

#### **Performance Innovations:**

Aladdin's walkoff carpet tile are designed specifically to protect facilities against excess dirt and moisture, all while providing enhanced safety with a non-slip surface in high moisture areas.


- Aladdin's walkoff carpet tile engineering provides a Class I fire rating a key aspect when specifying carpet for retail and general public entryways.
- The use of heavy 'scraper' yarns provides for ideal soil removal and collection. Each square yard can hold up to 5.6 lbs. of sand. That's 2.4 times its normal weight.
- Aladdin's walkoff carpet tiles can be easily cleaned by vacuuming or extracting. You can also remove individual tiles for cleaning or to replace damaged areas.

# Grass Valley Collection

Redefining the norm of mixing different materials and styles, Grass Valley offers 10 types of wood mixed with 3 stones. Created with deconstructivism in mind, this collection offers freedom of form and endless opportunities for unique artistic expression.

#### Features

- 2.5 mm overall thickness
- 8" x 48" wood planks and 12" x 24" stone tiles
- 20 mil wear layer
- M-Force<sup>™</sup> Enhanced Urethane Finish
- FloorScore® Certified
- 10 Year Limited Commercial Warranty
- 25 Year Limited Residential Warranty
- Made in America





4913 Dark Greige

872 Toasted Oak



9817 Flint



9411 Gray Mahogany



938 Good Gray



1714 Natural Mahogany



1357 Natural Cherry



32232 Natural Oak



9140 Silver Oak



9211 White Pine



9112 Gray Matter

941 Warm Gray



358 Stippled Gray

## COLORSTRAND SD NYLON

#### PERFORMANCE & DESIGN

- Wide variety of colors for excellent design flexibility
- Unsurpassed colorfastness to light and to atmospheric contaminants
- Excellent durability and longevity of color
- Resistant to harsh cleaning agents
- Mohawk Protection Plus Soil & Stain Resistant Technology

#### **SUSTAINABILITY**

- Contains an average of 30% pre-consumer recycled content
- CRI Green Label Plus® certified

### WARRANTY

- Lifetime Limited Wear Warranty
- Lifetime Static Warranty
- Lifetime Limited Colorfastness To Light Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants Warranty
- 10 Year Limited Stain Resistance Warranty

# **UltraSet**®

UltraSet is a premium vinyl carpet tile backing system containing a minimum of 50% recycled content. With over 20 years in the marketplace, its ultra dense construction is engineered to offer superior dimensional stability, high tuft bind that is resistant to edge ravel, and is impervious to moisture, while giving enhanced cushioning properties.

#### PERFORMANCE

- Unsurpassed dimensional stability no growing or shrinking
- Constructed with an ultra dense five layer cushion backing system
- Carpet tiles are impervious to moisture damage from spills and water extraction cleaning
- Construction features superior tuft bind that is highly resistant to edge ravel
- Proven performance for over 20 years

#### INSTALLATION

Direct glue down installation


#### • Floating installation using FlexLok Tabs

#### **SUSTAINABILITY**


- Minimum of 50% pre-consumer recycled content by total weight
- Contributes to LEED credits
- CRI Green Label Plus certified
- NSF/ANSI 140 Gold Certified

#### WARRANTY

 Limited Lifetime Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty



Replacing carpet tiles from different dyelots just got easier. With Mergeable Dyelot Carpet from Aladdin Commercial you can now confidently replace worn out carpet tiles without effecting the look of your spaces.

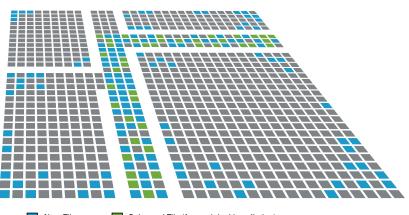

New Tile

Relocated Tile (from original installation)

# **Specifications**

CARPET TILE	Brand Style Name / Number Construction Surface Appearance Gauge Dye Method Fiber Type. Stain Release Technology Soil Release Technology Primary Backing Secondary Backing Indoor Air Quality NSF 140 Size Yds./Ctn Installation Method. Flammability Static Propensity Warranties	Design Medley II / 2B137 Tufted Textured Patterned Loop 1/12" (47.00 rows per 10 cm) 100% Solution Dyed Colorstrand® SD Nylon Mohawk Protection Plus Stain Protection Mohawk Protection Plus Soil Protection Non Woven Synthetic UltraSet® Green Label Plus Certified # 1098 Gold 24" x 24" (.6096 m x .6096 m) 8 Monolithic / Vertical Ashlar / Brick Ashlar / Quarter Turn / Multi-Directional ASTM E 648 Class 1 (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV Lifetime Limited Staic Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty
		Lifetime Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty
		10 Year Limited Colorfastness to Atmospheric Contaminants

Installation Instructions:

Monolithic		thic	Quarter Turn	Brick Ashlar	Vertical Ashlar	Multi-Directiona
1	1	1	↑ → ↑	† † †		1↓↓←
1	1	1	$\rightarrow$ $\uparrow$ $\rightarrow$	1 1 1		→ † →
1	1	1	$\uparrow \rightarrow \uparrow$	1 1 1		$\leftarrow \rightarrow \downarrow$

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method. For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com | 800.233.4490



Up to 2,000 sq. yds. available within 10 business days or less

## STEP 1

**REMOVE WORN TILES** Take up and discard worn out/stained carpet tiles from original installation.

### STEP 2

MIX NEW TILES FROM MULTIPLE DYELOTS AND/OR CARTONS Dye lots will vary slightly so mix them.

## STEP 3

BLEND IN OLD AND NEW TILES Take some unworn tiles from other rooms in the installation, replace them with new tiles, then mix them with the mergeable dyelot tiles and replace the worn out tiles you removed.



**COLOR**STRAND

SD NYLON

