















# **Color Pop Tile**

Solid, all loop textured 24 by 24 tile available in 48 colors. Install as a border, inset or accent tile. No more than two tiles wide and quarter turn only.






# Visionary Collection

Visionary Collection resilient sheet flooring by Aladdin Commercial, features five soft, organic visuals that are textile-inspired along with natural wood grain looks that create a warm and comforting environment. Constructed for light commercial and residential spaces offering excellent performance and durability, including our M-Force 1<sup>th</sup> Enhanced Urethane Finish for excellent wear and stain resistance, along with a no-polish option for lower maintenance costs.

#### **Features**

- Heterogeneous Construction
- 6' & 12' widths
- 20 mil wear layer
- .080" (2mm) overall thickness
- M-Force 1™ Enhanced Urethane Finish
- Specification ASTM F-1303

- Seams can be cold welded or heat welded
- Install with M95.0 or MS160 Spray Adhesive
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- Limited 25 Year Residential Warranty

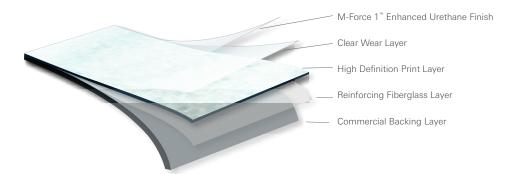

Visionary features a 20 mil commercial wear layer with M-Force 1™ Enhanced Urethane finish offering excellent wear and stain resistance and polish-optional for cost-effective maintenance.





Face Time 131 Savor



Face Time 848 Retreat



232 Belonging



Face Time 858 Repose



Face Time 949 Harmony



nv



Hand Cast 785 Mineral



Layer Up 555 Tranquil



Layer Up 771 Structure



Stoney Strokes



Stoney Strokes 559 Etchings



Stoney Strokes 995 Oilcloth



Urbane Chp 576 Storm



Urbane Chip



Urbane Chip



# COLOTSTRAND'SD

### PERFORMANCE & DESIGN

- Wide variety of colors for excellent design flexibility
- Unsurpassed colorfastness to light and to atmospheric contaminants
- Excellent durability and longevity of color
- · Resistant to harsh cleaning agents
- Mohawk Protection Plus Soil & Stain Resistant Technology

# SUSTAINABILITY

- Contains an average of 40% pre-consumer recycled content
- CRI Green Label Plus® certified

# WARRANTY

- Lifetime Limited Wear Warranty
- Lifetime Static Warranty
- Lifetime Limited Colorfastness To Light Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants Warranty
- 10 Year Limited Stain Resistance Warranty

# UltraSet®

UltraSet is a premium vinyl carpet tile backing system containing a minimum of 39% recycled content. With over 20 years in the marketplace, its ultra dense construction is engineered to offer superior dimensional stability, high tuft bind that is resistant to edge ravel, and is impervious to moisture, while giving enhanced cushioning properties.

#### **PERFORMANCE** SUSTAINABILITY

- Unsurpassed dimensional stability no growing or shrinking
- Constructed with an ultra dense five layer cushion backing system
- Carpet tiles are impervious to moisture damage from spills and water extraction cleaning
- Construction features superior tuft bind that is highly resistant to edge ravel
- Proven performance for over 20 years


- Minimum of 39% pre-consumer recycle content by total weight
- Contributes to LEED credits
- CRI Green Label Plus certified
- NSF/ANSI 140 Gold Certified

## **WARRANTY**

• Limited Lifetime Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty

### **INSTALLATION**

- Direct glue down installation
- Floating installation using FlexLok Tabs



# Specifications

CARPET TILE

CARPET TILE

Brand	Go Forward Tile / 1T45 Tufted	CARPET TILE
Stain Release Technology Soil Release Technology Primary Backing Secondary Backing	Mohawk Protection Plus Stain Mohawk Protection Plus Soil Non-Woven Synthetic UltraSet®	
Recycled Content	Contains 39% pre-consumer recycled content by total product weight Green Label Plus Certified # 1098	
SizeFlammability	24" x 24" (.6096 m x .6096 m) ASTM E 648 Class 1 (Glue Down)	
Smoke Density Static Propensity Warranties	ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty 10 Year Limited Colorfastness to Atmospheric Contaminant	ts

Brand	Tufted Level Patterned Loop 1/12" (47.00 rows per 10 cm) .100" (2.54 mm)
Stitches Per Inch	9.3 (36.61 per 10 cm) 5.040
Density Dye Method	100% Solution Dyed
Fiber Type	Colorstrand® SD Nylon
Stain Release Technology	Mohawk Protection Plus Stain
Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing	Non-Woven Synthetic
Secondary Backing	UltraSet®
Recycled Content	Contains 39% pre-consumer recycled
l	content by total product weight
Indoor Air Quality	Green Label Plus Certified # 1098
Size	24" x 24" (.6096 m x .6096 m)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Warranties	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty
	Lifetime Limited Static Protection Warranty  Lifetime Limited Edge Ravel, Zippering, Delamination
	and Dimensional Stability Warranty
	Lifetime Limited Colorfastness to Light Warranty
	10 Year Limited Stain Resistance Warranty
	10 Year Limited Colorfastness to Atmospheric Contaminants

١	Brand	Aladdin Commercial
	Style Name / Number	Set in Motion Tile / 1T43
	Construction	Tufted
	Surface Appearance	Patterned Loop
	Gauge	1/12" (47.00 rows per 10 cm)
	Pile Thickness	.123" (3.12 mm)
	Stitches Per Inch	9.2 (36.22 per 10 cm)
	Density	4,097
	Dye Method	100% Solution Dyed
	Fiber Type	Colorstrand® SD Nylon
	Stain Release Technology	Mohawk Protection Plus Stain
	Soil Release Technology	Mohawk Protection Plus Soil
	Primary Backing	Non-Woven Synthetic
	Secondary Backing	UltraSet®
	Recycled Content	Contains 39% pre-consumer recycled
		content by total product weight
	Indoor Air Quality	Green Label Plus Certified # 1098
	Size	24" x 24" (.6096 m x .6096 m)
	Flammability	ASTM E 648 Class 1 (Glue Down)
	Smoke Density	ASTM E 662 Less than 450
	Static Propensity	AATCC-134 Under 3.5 KV
	Warranties	Lifetime Limited Wear Warranty
		Lifetime Limited Static Protection Warranty
		Lifetime Limited Edge Ravel, Zippering, Delamination
		and Dimensional Stability Warranty
		Lifetime Limited Colorfastness to Light Warranty
		10 Year Limited Stain Resistance Warranty
		10 Year Limited Colorfastness to Atmospheric Contaminants

-	nstalla	ation	Instri	ictio	ns:												
C	luarter	Turn	В	rick .	Ashl	ar	V	ertical A	shla	r	Mor	olith	nic	Mul	ti-Di	recti	onal
	↑ →	1	] [	†	t I	†		. [+	1		1	1	†	†	1	<b>←</b>	
Ī	→ ↑	-	1 -	1	1	†		<b>₩</b>	1		†	1	†	<b>→</b>	1	<b>→</b>	
I	↑ →	1		1	1	1		4	1		1	1	1	<b>←</b>	-	+	



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com I 800.233.4490



