

AR



Enduring Function 521 Limitless Potential, Town Center II 557 Shadow Mountain

40. 1410

Distinctive Appeal 869 Vivid Vision

Town Center II

Town Center II offers an array of beautiful colors from soft, warm neutrals to bold, vivid accents. Available in our Weldlok® broadloom backing system and is available in both a 30 oz. and 36 oz. weight.



876 Potting Soil

929 Liquid Silver

945 Rushing River

959 Wrought Iron

979 Jet Black



996 Earthen Jute



Emergent Collection

Proudly manufactured in America, Emergent LVT celebrates the vibrant, versatile spirit of our local communities. Appealing natural wood visuals are designed to fit any interior, providing a core collection of LVT styles to use for a variety of projects.

Features

- M-Force 1[™] Enhanced Urethane finish and 20 mil wear layer protect against commercial traffic
- Wood textures emulate natural materials
- No polish maintenance reduces occupied costs
- Diverse color line spans from traditional to contemporary influences
- Designed to coordinate with a variety of Aladdin Commercial carpet collections
- 6" x 48" plank size
- Limited 10 Year Commercial Warranty
- Limited 25 Year Residential Warranty
- Made in America

Emergent Clic



Uniclic® is the premier locking system in the hard surface industry, reducing time and costs associated with installation of luxury vinyl tiles. Uniclic's special tongue and groove shape easily creates a tight connection between joints.



141 Flax Straw



142 Basketry



342 Burnished



358 Split Rail





958 Garden Wall



Emergent

812 Antiquity



829 Mocha Accent

918 Abbey Stone

938 Canyon

949 Iron Gate






Visionary Collection

Visionary Collection resilient sheet flooring by Aladdin Commercial, features five soft, organic visuals that are textile-inspired along with natural wood grain looks that create a warm and comforting environment. Constructed for light commercial and residential spaces offering excellent performance and durability, including our M-Force 1[™] Enhanced Urethane Finish for excellent wear and stain resistance, along with a no-polish option for lower maintenance costs.

Features

- Heterogeneous Construction
- 6' & 12' widths
- 20 mil wear layer
- .080" (2mm) overall thickness
- M-Force 1[™] Enhanced Urethane Finish
- Specification ASTM F-1303

- Seams can be cold welded or heat welded
- Install with M95.0 or MS160 Spray Adhesive
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- Limited 25 Year Residential Warranty

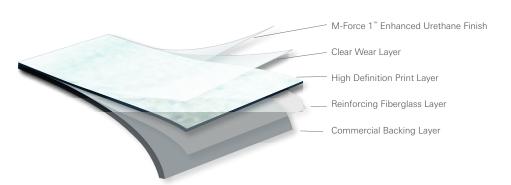

Visionary features a 20 mil commercial wear layer with M-Force 1[™] Enhanced Urethane finish offering excellent wear and stain resistance and polish-optional for cost-effective maintenance.









Face Time 848 Retreat

Face Time 232 Belonging



Face Time

949 Harmony





Hand Cast 785 Mineral

-

Layer Up 555 Tranquil



Stoney Strokes 774 Linen

s Stoney Strokes 559 Etchings

Stoney Strokes 995 Oilcloth

Urbane Chp 576 Storm

Urbane Chip 959 Sensation

Urbane Chip 769 Suave

Tayer Up Si 771 Structure

Enduring Function 521 Limitless Potential, Face Time 131 Savor



PERFORMANCE & DESIGN

- Wide variety of colors for excellent design flexibility
- Unsurpassed colorfastness to light and to atmospheric contaminants
- Excellent durability and longevity of color
- Resistant to harsh cleaning agents
- Mohawk Protection Plus Soil & Stain Resistant Technology

SUSTAINABILITY

- Contains an average of 40% pre-consumer recycled content
- CRI Green Label Plus® certified

WARRANTY

- Lifetime Limited Wear Warranty
- Lifetime Static Warranty
- Lifetime Limited Colorfastness To Light Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants Warranty
- 10 Year Limited Stain Resistance Warranty

Weldlok[®] Plus

Weldlok[®] Plus is an advanced high performance backing system designed to provide long term carpet durability while delivering sustainable benefits. The backing system utilizes a high performance thermoset adhesive designed to deliver greater dimensional stability and long term performance by encapsulating the carpet back stitch, and securing the secondary backing to the substrate. Weldlok[®] Plus contains a minimum of 31% pre-consumer recycle content by total product weight.

Primary Backing

High Performance Thermoset Adhesive

Reinforced Woven Synthetic

PERFORMANCE

- High performance backing designed for demanding commercial environments
- Greater dimensional stability no growing or shrinking
- High tuft bind properties
- Eliminates edge ravel and zippering

INSTALLATION

• Direct glue or stretch in installations

SUSTAINABILITY

- Minimum 31% pre-consumer recycled content by total product weight
- NSF / ANSI 140 Gold Certified
- CRI Green Label Plus Certified

WARRANTY

• Lifetime Limited Tuft Bind, Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty

Specifications

G
⋝
5
õ
_
≤
0
£
в

Brand Collection	Aladdin Commercial	
Indoor Air Quality NSF 140 Size Pattern Repeat Flammability Smoke Density Static Propensity Warranties	content by total product weight Green Label Plus Certified # 3802 Gold 12' width (3.66 m) 18" W x 28.83" L ASTM E 648 Class 1 (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV Lifetime Limited Wear Warranty Lifetime Limited Glge Ravel, Zippering, Delamination and Dimensional Stability Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Colorfastness to Light Warranty	

10 Year Limited Stain Resistance Warranty

10 Year Limited Colorfastness to Atmospheric Contaminants

Brand	Aladdin Commercial
Collection	Inspiration Collection
Style Name / Number	Transversal Approach / 2B78
Construction	Tufted
Surface Appearance	Textured Patterned Loop
Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	16 oz./yd (542 g/m²)
Density	4,881
Dye Method	100% Solution Dyed
Fiber Type	Colorstrand [®] SD Nylon
Stain Release Technology	Mohawk Protection Plus Stain
Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok [®] Plus
Recycled Content	Contains 31% pre-consumer recycled
	content by total product weight
Indoor Air Quality	Green Label Plus Certified # 3802
NSF 140	Gold
Size	12' width (3.66 m)
Pattern Repeat	18" W x 17.75" L
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Warranties	Lifetime Limited Wear Warranty
	Lifetime Limited Edge Ravel, Zippering, Delamination
	and Dimensional Stability Warranty
	Lifetime Limited Static Protection Warranty
	Lifetime Limited Colorfastness to Light Warranty

10 Year Limited Stain Resistance Warranty

10 Year Limited Colorfastness to Atmospheric Contaminants

ß BROADLOOM

Brand	Aladdin Commercial	6	Brand	Aladdin Commercial
Collection		_	Collection	Inspiration Collection
Style Name / Number	Surface Purpose / 2B75	Σ	Style Name / Number	Distinctive Appeal / 2B76
Construction	Tufted	ADLOOM	Construction	Tufted
Surface Appearance	Textured Patterned Loop		Surface Appearance	Textured Patterned Loop
Gauge	1/12" (47.00 rows per 10 cm)	R 0 4	Gauge	1/12" (47.00 rows per 10 cm)
Tufted Weight	16 oz./yd (542 g/m ²)	BB	Tufted Weight	16 oz./yd (542 g/m ²)
Density	5,877		Density	7,111
Dye Method	100% Solution Dyed		Dye Method	100% Solution Dyed
Fiber Type	Colorstrand [®] SD Nylon		Fiber Type	Colorstrand [®] SD Nylon
Stain Release Technology	Mohawk Protection Plus Stain Mohawk Protection Plus Soil Woven Polypropylene		Stain Release Technology	Mohawk Protection Plus Stain
Soil Release Technology			Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing			Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok [®] Plus		Secondary Backing	Weldlok [®] Plus
Recycled Content	Contains 31% pre-consumer recycled		Recycled Content	Contains 31% pre-consumer recycled
	content by total product weight			content by total product weight
Indoor Air Quality	Green Label Plus Certified # 3802		Indoor Air Quality	Green Label Plus Certified # 3802
NSF 140	Gold		NSF 140	Gold
Size	12' width (3.66 m)		Size	12' width (3.66 m)
Pattern Repeat	18" W x 18.46" L		Pattern Repeat	18" W x 27.05" L
Flammability	ASTM E 648 Class 1 (Glue Down)		Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450		Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV		Static Propensity	AATCC-134 Under 3.5 KV
Warranties	Lifetime Limited Wear Warranty		Warranties	Lifetime Limited Wear Warranty
	Lifetime Limited Edge Ravel, Zippering, Delamination			Lifetime Limited Edge Ravel, Zippering, Delamination
	and Dimensional Stability Warranty			and Dimensional Stability Warranty
	Lifetime Limited Static Protection Warranty			Lifetime Limited Static Protection Warranty
	Lifetime Limited Colorfastness to Light Warranty			Lifetime Limited Colorfastness to Light Warranty

Lifetime Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty

10 Year Limited Colorfastness to Atmospheric Contaminants

$\cap C$ COMMERCIAL

10 Year Limited Colorfastness to Atmospheric Contaminants

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com | 800.233.4490



SD NYLON



10 Year Limited Stain Resistance Warranty