Modern Approach Collection 27









51

D



Envir: Strand SD

PERFORMANCE & DESIGN

- An amazing range of style and color options available for design flexibility
- EnviroStrand[™] SD is constructed with our patented Continuum[™] technology, providing the ultimate innovation in PET carpet
- Mohawk Protection Plus Soil & Stain Resistant Technology
- Ease of maintenance

SUSTAINABILITY

- Contains an average of 91% post-consumer and 1% pre-consumer recycled content
- Requires less energy to produce in the manufacturing process
- Mohawk reclaims more than 3 billion plastic bottles each year that are recycled back into our Continuum[™] process
- CRI Green Label Plus® certified

WARRANTY

- 10 Year Limited Wear Warranty
- 10 Year Static Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants
- 10 Year Limited Stain Resistance Warranty
- 10 Year Resistance To Light

Weldlok®

Weldlok[®] is the standard broadloom backing system specifically designed for commercial applications. The Weldlok backing is laminated to our products utilizing a commercial thermoset adhesive. This adhesive is designed to encapsulate and penetrate the carpet back stitch in the main application coat, while the second application coat secures the secondary backing to the carpet substrate for a cost effective performance standard.

Primary Backing

Thermoset Adhesive Reinforced Woven Synthetic

PERFORMANCE

• Excellent pattern match capabilities

SUSTAINABILITY

- Minimum 36% pre-consumer recycled content by total product weight
- NSF/ANSI 140 Gold certified
- Contributes to LEED credits
- CRI Green Label Plus certified

INSTALLATION

• Direct glue or stretch in installations

WARRANTY

• Limited 10 Year Wear Warranty




Entrenched

Entrenched Luxury Vinyl Tile (LVT) features a micro bevel with inherent colored edges to enhance joints from plank to plank. This unique detail paired with a range of wood grains and color tones brings beauty to any work space.

Features

- 6" x 48" plank size
- 12 mil wear layer
- Commercial Urethane Finish
- 2 mm overall thickness
- Glue down with recommended adhesive: M95.0, MS160 spray adhesive or M700 Pressure Sensitive Adhesive
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- Limited 25 Year Residential Warranty
- No-polish maintenance reduces cost
- Optional Underlayment Mohawk AccuSound[™]

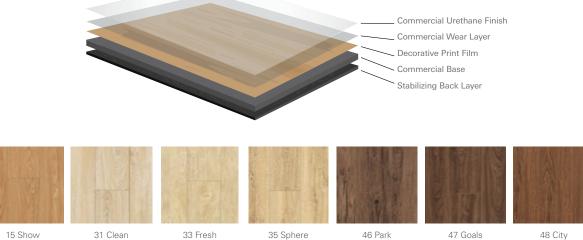

31 Clean

33 Fresh

35 Sphere

46 Park









92 Lush

93 South

94 Enrich

95 Batik

96 Flux

99 Engage

Specifications

ß
Σ
0
0
1
Ā
ΡO
Ř
в

G

BROADLOOM

Brand	Aladdin Commercial
Collection	Modern Approach
Style Name / Number	Renewed View / 2B9
Construction	Tufted
Gauge	1/10" (39.37 rows per
Density	3,892
Dye Method	100% Solution Dyed
Fiber Type	Envirostand [™] SD PET
Stain Release Technology	Mohawk Protection P
Soil Release Technology	Mohawk Protection P
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok®
Recycled Content	Contains a minimum
	recycled content by to
Indoor Air Quality	Green Label Plus Cert
Size	12' width (3.66 m)
Flammability	ASTM E 648 Class 1 (
Smoke Density	ASTM E 662 Less that
Static Propensity	AATCC-134 Under 3.5
Warranties	10 Year Limited Wear
	10 Year Limited Station
	Collection

Modelli Approdell
Renewed View / 2B98
Tufted
1/10" (39.37 rows per 10 cm)
3,892
100% Solution Dyed
Envirostand [™] SD PET
Mohawk Protection Plus Stain
Mohawk Protection Plus Soil
Woven Polypropylene
Weldlok®
Contains a minimum of 39% pre-consumer
recycled content by total product weight
Green Label Plus Certified
12' width (3.66 m)
ASTM E 648 Class 1 (Glue Down)
ASTM E 662 Less than 450
AATCC-134 Under 3.5 KV
10 Year Limited Wear Warranty
10 Year Limited Static Protection Warranty
10 Year Limited Colorfastness to Light Warranty
10 Year Limited Stain Resistance Warranty
10 Year Limited Colorfastness to Atmospheric
Contaminants

Brand	Aladdin Commercial
Collection	Modern Approach
Style Name / Number	Seamless Vision / 2BS
Construction	Tufted
Gauge	1/10" (39.37 rows per
Density	4,617
Dye Method	100% Solution Dyed
Fiber Type	Envirostand [™] SD PET
Stain Release Technology	Mohawk Protection Pl
Soil Release Technology	Mohawk Protection P
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok®
Recycled Content	Contains a minimum o
	recycled content by to
Indoor Air Quality	Green Label Plus Certi
Size	12' width (3.66 m)
Flammability	ASTM E 648 Class 1 (0
Smoke Density	ASTM E 662 Less than
Static Propensity	AATCC-134 Under 3.5
Warranties	10 Year Limited Wear
	10 Year Limited Static

95 10 cm) Plus Stain Plus Soil of 39% pre-consumer otal product weight tified (Glue Down) in 450 KV Warranty 10 Year Limited Static Protection Warranty 10 Year Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants

Collection	Bright Perspective / 2B97 Tufted 1/10" (39.37 rows per 10 cm) 4,714 100% Solution Dyed Envirostand [™] SD PET Mohawk Protection Plus Stain Mohawk Protection Plus Soil Woven Polypropylene Weldlok [®] Contains a minimum of 39% pre-consumer recycled content by total product weight Green Label Plus Certified 12' width (3.66 m) ASTM E 648 Class 1 (Glue Down) ASTM E 662 Less than 450	BROADLOOM	Density Dye Method	Enlighten Factor / 2B96 Tufted 1/10" (39.37 rows per 10 cm) 3,565 100% Solution Dyed Envirostand™ SD PET Mohawk Protection Plus Stain Mohawk Protection Plus Soil Woven Polypropylene Weldlok® Contains a minimum of 39% pre-consumer recycled content by total product weight Green Label Plus Certified 12' width (3.66 m) ASTM E 648 Class 1 (Glue Down) ASTM E 662 Less than 450
	10 Year Limited Colorfastness to Atmospheric			10 Year Limited Colorfastness to Atmospheri

ß

BROADLOOM

rranty 10 Year Limited Colorfastness to Atmospheric Contaminants



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com | 800.233.4490



Contaminants

Envir: Strand SD



