

WalkOff Entryway System

Walked in soil and moisture are the main causes of premature wear and eventual replacement of flooring interiors. Effective placement of Aladdin's walkoff carpet tiles can reduce the amount of soil and moisture enterin a facility by up to 91%. This means lowered maintenance costs and extended life for all floor coverings beyond the entry.

Performance Innovations:

Aladdin's walkoff carpet tile are designed specifically to protect facilities against excess dirt and moisture, all while providing enhanced safety with a non-slip surface in high moisture areas.


- Aladdin's walkoff carpet tile engineering provides a Class I fire rating a key aspect when specifying carpet for retail and general public entryways.
- The use of heavy 'scraper' yarns provides for ideal soil removal and collection. Each square yard can hold up to 5.6 lbs. of sand. That's 2.4 times its normal weight.
- Aladdin's walkoff carpet tiles can be easily cleaned by vacuuming or extracting.
 You can also remove individual tiles for cleaning or to replace damaged areas.

Grass Valley Collection

Redefining the norm of mixing different materials and styles, Grass Valley offers 11 types of wood mixed with 3 stones. Created with deconstructivism in mind, this collection offers freedom of form and endless opportunities for unique artistic expression.

Features:

- 2.5 mm and 4.2 mm overall thickness
- 8" x 48" wood planks and 12" x 24" stone tiles 10 Year Limited Commercial Warranty
- 12 and 20 mil wear layer
- M-Force[™] 1 Enhanced Urethane Finish
- FloorScore® Certified
- 25 Year Limited Residential Warranty
- Made in America

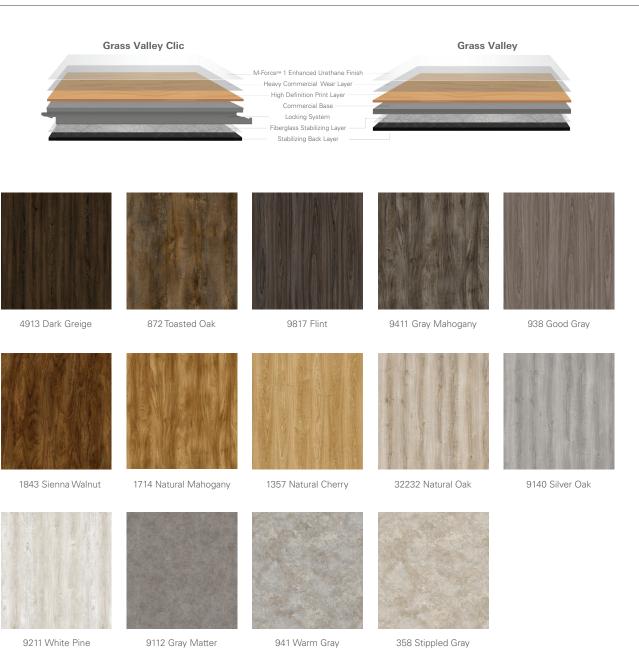

Color Pop Tile

Solid color textured loop available in 48 colors in $24" \times 24"$ square tiles and select colors in $12" \times 36"$ planks. Install as a border, inset or accent tile. No more than two tiles of the same color wide and quarter turn only.





COLORSTRAND® SD NYLON

PERFORMANCE & DESIGN

- Wide variety of colors for excellent design flexibility
- Unsurpassed colorfastness to light and to atmospheric contaminants
- · Excellent durability and longevity of color
- · Resistant to harsh cleaning agents
- Mohawk Protection Plus Soil & Stain Resistant Technology

SUSTAINABILITY

- Contains an average of 40% pre-consumer recycled content
- CRI Green Label Plus® certified

WARRANTY

- Lifetime Limited Wear Warranty
- Lifetime Static Warranty
- Lifetime Limited Colorfastness To Light Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants Warranty
- 10 Year Limited Stain Resistance Warranty

UltraSet®

UltraSet is a premium vinyl carpet tile backing system containing a minimum of 39% recycled content. With over 20 years in the marketplace, its ultra dense construction is engineered to offer superior dimensional stability, high tuft bind that is resistant to edge ravel, and is impervious to moisture, while giving enhanced cushioning properties.

PERFORMANCE

- Unsurpassed dimensional stability no growing or shrinking
- Constructed with an ultra dense five layer cushion backing system
- Carpet tiles are impervious to moisture damage from spills and water extraction cleaning
- Construction features superior tuft bind that is highly resistant to edge ravel
- Proven performance for over 20 years

WARRANTY


Limited Lifetime Edge Ravel, Zippering,
 Delamination and Dimensional Stability Warranty

SUSTAINABILITY

- Minimum of 39% pre-consumer recycled content by total weight
- Contributes to LEED credits
- CRI Green Label Plus certified
- NSF/ANSI 140 Gold Certified

INSTALLATION


- Direct glue down installation
- Floating installation using FlexLok Tabs



Specifications

	Brand	Aladdin Commercial		Brand	Aladdin Commercial			
	Collection	Rediscovery Collection		Collection	Rediscovery Collection			
TILE	Style Name / Number	Accede II Tile / 2B165	۳ ا	Style Name / Number	Allocation II Tile / 2B166			
⊏	Construction	Tufted	=	Construction				
PET	Surface Appearance			Surface Appearance				
CARPI		1/12" (47.00 rows per 10 cm)	<u>_</u>	Gauge				
	Dye Method			Dye Method				
٦	Fiber Type		S	Fiber Type				
		Mohawk Protection Plus Stain			Mohawk Protection Plus Stain			
		Mohawk Protection Plus Soil			Mohawk Protection Plus Soil			
	Primary Backing			Primary Backing				
	Secondary Backing			Secondary Backing				
		cycled Content			Contains 39% pre-consumer recycled			
	,	content by total product weight Green Label Plus Certified # 1098		,	content by total product weight Green Label Plus Certified # 1098			
	,			NSF 140				
	NSF 140	24" x 24" (.6096 m x .6096 m)						
					24" x 24" (.6096 m x .6096 m)			
	Yds./Ctn			Yds./Ctn				
	installation Method	Monolithic / Vertical Ashlar / Brick Ashlar /		installation ivietnod	Monolithic / Vertical Ashlar / Brick Ashlar /			
	E	Quarter Turn		EL 1995	Quarter Turn			
		ASTM E 648 Class 1 (Glue Down)			ASTM E 648 Class 1 (Glue Down)			
	Smoke Density			Smoke Density				
	Static Propensity				AATCC-134 Under 3.5 KV			
	Warranties	Lifetime Limited Wear Warranty		Warranties	Lifetime Limited Wear Warranty			
		Lifetime Limited Static Protection Warranty			Lifetime Limited Static Protection Warranty			
		Lifetime Limited Edge Ravel, Zippering, Delamination	n		Lifetime Limited Edge Ravel, Zippering, Delamination			
		and Dimensional Stability Warranty		and Dimensional Stability Warranty				
		Lifetime Limited Colorfastness to Light Warranty	Lifetime Limited Colorfastness to Light Warranty					
		10 Year Limited Stain Resistance Warranty		10 Year Limited Stain Resistance Warranty				
		10 Year Limited Colorfastness to Atmospheric Contain	10 Year Limited Colorfastness to Atmospheric Contaminants					
	Brand	Aladdin Commercial						
_	Collection							
Щ		Design Medley II Tile / 2B137						
≓	Construction							
PET	Surface Appearance							
Z I	Gauge							
CAR	Dye Method							
0	Fiber Type	,						
	Stain Release Technology							
		Mohawk Protection Plus Stain Mohawk Protection Plus Soil						
	Primary Backing							
	Secondary Backing							
	, .	Contains 39% pre-consumer recycled						
	necycleu Content	content by total product weight						
	Indoor Air Quality	Green Label Plus Certified # 1098						
	NSF 140							
	Yds./Ctn	24" x 24" (.6096 m x .6096 m)						
		8 Monolithic / Vertical Ashlar / Brick Ashlar /						
	mstaliation ivietnod							
	Flammahilitu	Quarter Turn / Multi Direcitonal						
	,	ASTM E 648 Class 1 (Glue Down) ASTM E 662 Locs than 450						
	Smoke Density							
	Static Propensity							
ı	vvarranties	Lifetime Limited Wear Warranty						
		Lifetime Limited Static Protection Warranty						
	Lifetime Limited Edge Ravel, Zippering, Delamination							
		and Dimensional Stability Warranty						
		Lifetime Limited Colorfastness to Light Warranty						

Installation Instructions:





Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com I 800.233.4490

10 Year Limited Stain Resistance Warranty

10 Year Limited Colorfastness to Atmospheric Contaminants





