








Grass Valley Collection

Redefining the norm of mixing different materials and styles, Grass Valley offers 11 types of wood mixed with 3 stones. Created with deconstructivism in mind, this collection offers freedom of form and endless opportunities for unique artistic expression.

Features:

- 2.5 mm and 4.2 mm overall thickness
- 8" x 48" wood planks and 12" x 24" stone tiles 10 Year Limited Commercial Warranty
- 12 and 20 mil wear layer
- M-Force[™] 1 Enhanced Urethane Finish
- FloorScore® Certified
- 25 Year Limited Residential Warranty
- Made in America

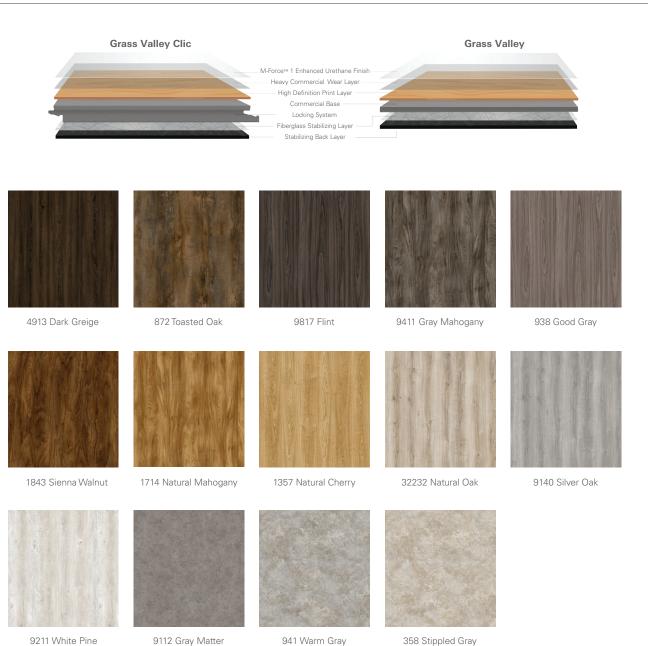



PERFORMANCE & DESIGN

- Premium Olefin with vivid, natural colorations
- Inherent stain and fade resistance for ease of maintenance
- Mohawk Protection Plus Soil & Stain Resistant Technology
- Economical option

SUSTAINABILITY

• CRI Green Label Plus® certified

WARRANTY

- 10 Year Limited Wear Warranty
- 10 Year Static Warranty
- 10 Year Limited Stain Resistance Warranty
- 10 Year Limited Colorfastness To Light Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants



Weldlok® is the standard broadloom backing system specifically designed for commercial applications. The Weldlok backing is laminated to our products utilizing a commercial thermoset adhesive. This adhesive is designed to encapsulate and penetrate the carpet back stitch in the main application coat, while the second application coat secures the secondary backing to the carpet substrate for a cost effective performance standard.

Primary Backing Thermoset Adhesive Reinforced Woven Synthetic

PERFORMANCE

• Excellent pattern match capabilities

SUSTAINABILITY

- Minimum 36% pre-consumer recycled content by total product weight
- NSF/ANSI 140 Gold certified
- Contributes to LEED credits
- CRI Green Label Plus certified

INSTALLATION

• Direct glue or stretch in installations

WARRANTY

• Limited 10 Year Wear Warranty

Specifications

ĽВ

BROADLOOM

BROADLOOM

BUNADLUUM	Density	Rewired Collection Embedded Power / 2B167 Tufted Graphic Loop 1/10" (39.37 rows per 10 cm) 4,053 100% Solution Dyed PermaStrand® Olefin Mohawk Protection Plus Stain Mohawk Protection Plus Soil Woven Polypropylene Weldlok® Green Label Plus Certified # 3878 12' width (3.66 m) 2.4" W x 6.5" L ASTM E 648 Class II (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV	AUL	Style Name / Number Construction	Rewired Collection Strong Connections / 2B63 Tufted Graphic Loop 1/10" (39.37 rows per 10 cm) 4,645 100% Solution Dyed PermaStrand® Olefin Mohawk Protection Plus Stain Mohawk Protection Plus Soil Woven Polypropylene Weldlok® Green Label Plus Certified # 3878 12' width (3.66 m) 0.4" W x 0.7" L ASTM E 648 Class II (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV
	Flammability	ASTM E 648 Class II (Glue Down)		Flammability	ASTM E 648 Class II (Glue Down)
	'			,	
	Warranties	ies		Warranties	10 Year Limited Wear Warranty Lifetime Limited Static Protection Warranty 10 Year Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants

Brand	Aladdin Commercial		
Collection	Rewired Collection		
Style Name / Number	Unplugged / 2B51		
Construction	Tufted		
Surface Appearance	Graphic Loop		
Gauge	1/10" (39.37 rows per 10 cm)		
Density	4,028		
Dye Method	100% Solution Dyed		
Fiber Type	PermaStrand® Olefin		
Stain Release Technology	Mohawk Protection Plus Stain		
Soil Release Technology	Mohawk Protection Plus Soil		
Primary Backing	Woven Polypropylene		
Secondary Backing	Weldlok®		
Indoor Air Quality	Green Label Plus Certified # 3878		
Size	12' width (3.66 m)		
Pattern Repeat	1.2" W x 1.9" L		
Flammability	ASTM E 648 Class II (Glue Down)		
Smoke Density	ASTM E 662 Less than 450		
Static Propensity	AATCC-134 Under 3.5 KV		
Warranties	10 Year Limited Wear Warranty		
	10 Year Limited Static Protection Warranty		
	10 Year Limited Colorfastness to Light Warranty		
	10 Year Limited Stain Resistance Warranty		
	10 Year Limited Colorfastness to Atmospheric Contaminants		



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com I 800.233.4490





