

Entrenched














Entrenched

Entrenched Luxury Vinyl Tile (LVT) features a micro bevel with inherent colored edges to enhance joints from plank to plank. This unique detail paired with a range of wood grains and color tones brings beauty to any work space.

Features

- 6" x 48" plank size
- 12 mil wear layer
- Commercial Urethane Finish
- 2 mm overall thickness
- Glue down with recommended adhesive: M95.0, MS160 spray adhesive or M700 Pressure Sensitive Adhesive
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- Limited 25 Year Residential Warranty
- No-polish maintenance reduces cost
- Optional Underlayment - Mohawk AccuSound™

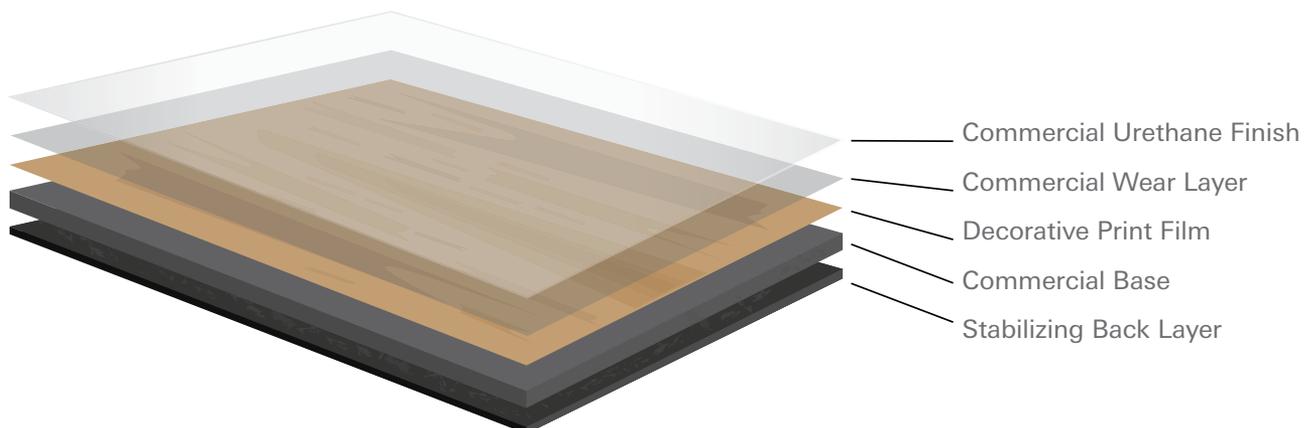

Specifications

LVT	Brand.....	Aladdin Commercial
	Style Name / Number	Entrenched / AH077
	Product Type.....	Luxury Vinyl Tile
	Overall Thickness.....	2mm
	Wear Layer	12 mil (0.3mm)
	Finish	Commercial Urethane Finish
	Colors Available.....	14, with Inherent Colored Edges
	Size	6"x48" (152.4mm x 1,219.2mm)
	Packaging SF/CTN.....	36 sf/ctn (3.34m ² /ctn); 18 pcs/ctn; 66 ctns/pallet
	Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
	Squareness.....	ASTM F2055 - Passes - \pm 0.010 in. max
	Size and Tolerance.....	ASTM F2055 - Passes - at \pm 0.024 in. per linear foot
	Thickness.....	ASTM F386 - Passes - \pm 0.005 in.
	Flexibility	ASTM F137 - Passes - 1 in. Mandrel / No crack or break
	Dimensional Stability	ASTM F2199 - Passes - 6hrs@180F, 0.12%
	Residual Indentation	ASTM F1914 - Passes - Average less than 8%
	Slip Resistance.....	ASTM D2047 - Passes - $>$ 0.6
	Resistance to Chemicals	ASTM F925 - Passes - No Change or Slight Change
	Resistance to Light.....	ASTM F1515 - Passes - $\Delta F <$ 8
	Resistance to Heat	ASTM F1514 - Passes - $\Delta F <$ 8
Critical Radiant Flux	ASTM E648 - Passes - $>$.45 watts/cm ² , Class 1	
Smoke Density.....	ASTM E662 - Passes	
Installation.....	Glue Down	
Adhesive.....	Primary: M700. May also use MS160 Spray or M95.0 Acrylic	
Optional Underlayment	Mohawk AccuSound™	
Certification	FloorScore® Certified	
Warranty.....	10 Year Light Commercial Warranty 25 Year Residential Warranty	

Aladdin™
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com 1 800.233.4490



Up to 10,000 sq. ft. available within 10 business days or less

