

Foothpath Collection





E MENU
DRINKS
\$4.99
\$3.99
\$4.99
\$4.75
\$5.99
\$5.99
\$4.99
D DRINKS
\$5.75
\$6.99
\$5.75
\$5.75

Quartz Stone 94
Cover: Prairie Wood 960






Footpath Collection

Footpath Collection from Aladdin Commercial pairs fashion-forward design with innovative performance and technology. Featuring an array of colorways in both stone and wood looks, Footpath is available in both 7.5" x 52" planks as well as 12" x 24" tiles. This collection is also offered in 3 different construction types, 12 mil clic, 20 mil clic, and 20 mil glue down. The wide variety of options in Footpath make this an ideal choice for virtually any commercial interior.

Features:

- 4.2 mm (clic), 2.5 mm (Glue down)
- 7.5" x 52" and 12" x 24" sizes
- 12 mil or 20 mil commercial wear layer
- Available in Clic and Glue Down construction
- M-Force™ Enhanced Urethane Finish
- FloorScore Certified
- Ease of installation with Unidrop® Multifit Locking System
- Limited 10 Year Light Commercial Warranty (12 mil)
- Limited 10 Year Commercial Warranty (20 mil)
- Limited 25 Year Residential Warranty

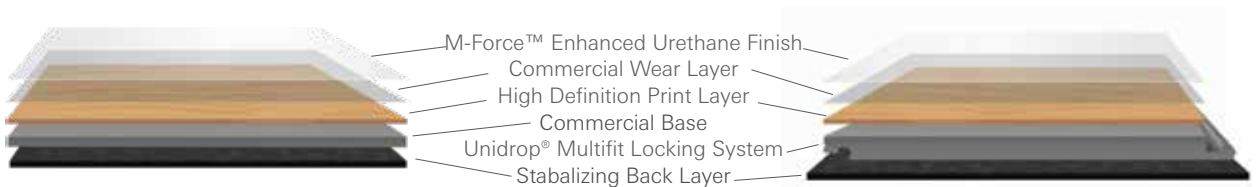

87 Autumn Gold Wood



91 Silver Fox Wood



92 Dove Tail Wood



93 Burberry Wood



94 Quartz Stone



220 Biloba Wood



280 Barnwood Wood



450 Amtico Wood



840 Charleston Wood



880 Kodiak Wood



930 Moon Stone




960 Prairie Wood

Mohawk Transitions

The Mohawk transitions moisture resistant molding provides the functionality of a T-Molding and Reducer in a single, easy to install, piece. The unique flexible zone design of the Mohawk transitions track allows installation of the profile on either direction, thus eliminating the guess work out of positioning the trim.

METHOD 1: T-MOLDING


As a T-Molding transition, Mohawk transitions are designed to accommodate the expansion gap between floors of equal heights, ranging in thickness from 3-8mm.



T-MOLDING

METHOD 2: REDUCER

As a Reducer transition, Mohawk transitions are designed to accommodate the expansion gap between floors of unequal heights, ranging in thickness from 3-8mm.



REDUCER

SPECIFICATIONS

- Dimensions: 78.75 inches in length by 1.75 inches in width
- Core material: PVC
- Surface material: highly wear resistant rigid PVC
- Primary applications: Luxury Vinyl Flooring
- Patent pending


		T-Molding & Reducer 2-in-1 Transition
Color #	Style Name	Style/Color #
87 Autumn Gold Wood	Footpath	AV2N1-03338
91 Silver Fox Wood	Footpath	AV2N1-04357
92 Dove Tail Wood	Footpath	AV2N1-03742
93 Burberry Wood	Footpath	AV2N1-04796
94 Quartz Stone	Footpath	AV2N1-05083
220 Blioba Wood	Footpath	AV2N1-05062
280 Barnwood Wood	Footpath	AV2N1-04774
450 Amtico Wood	Footpath	AV2N1-05063
840 Charleston Wood	Footpath	AV2N1-05065
880 Kodiak Wood	Footpath	AV2N1-05066
930 Moon Rock Stone	Footpath	AV2N1-05061
960 Prairie Wood	Footpath	AV2N1-05064

Mohawk Stairnose

The Mohawk stairnose is a moisture resistant molding that is suitable to finish stair installations of LVT. Designed for functionality, versatility, and uniqueness, it can be installed either flush or overlapped. Ranging from 2mm in thickness to 7.5mm, the Mohawk stairnose can accommodate bull-nosed and squared-nosed stair installations.

TRIM SPECIFICATIONS

- Selling Style: AVFSN
- Dimensions: 94.5" x 4.5"
- Core material: Rigid Vinyl
- Surface material: highly wear resistant rigid PVC
- ADA compliant

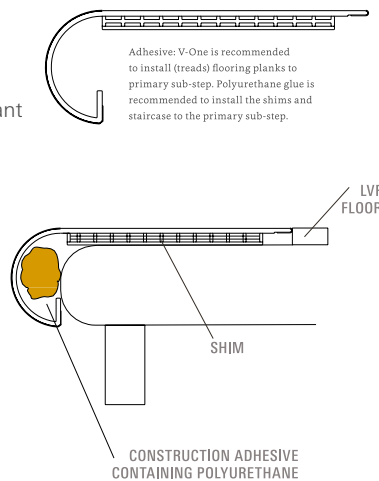

		Stairnose
Color #	Style Name	Style/Color #
87 Autumn Gold Wood	Footpath	AVFSN-03338
91 Silver Fox Wood	Footpath	AVFSN-04357
92 Dove Tail Wood	Footpath	AVFSN-03742
93 Burberry Wood	Footpath	AVFSN-04796
94 Quartz Stone	Footpath	AVFSN-05083
220 Blioba Wood	Footpath	AVFSN-05062
280 Barnwood Wood	Footpath	AVFSN-04774
450 Amtico Wood	Footpath	AVFSN-05063
840 Charleston Wood	Footpath	AVFSN-05065
880 Kodiak Wood	Footpath	AVFSN-05066
930 Moon Rock Stone	Footpath	AVFSN-05061
960 Prairie Wood	Footpath	AVFSN-05064

Specifications

□	<p>Brand..... Aladdin Commercial</p> <p>Style Name / Number..... Footpath 12 Clic / AH035</p> <p>Product Type..... Luxury Vinyl Tile</p> <p>Overall Gauge..... 4.2 mm</p> <p>Wear Layer..... 12 mil</p> <p>Finish..... M-Force™ Enhanced Urethane Finish</p> <p>Colors Available..... 10 wood / 2 stone</p> <p>Size..... 10 clsr 7.5" x 52" / 2 clsr 12" x 24"</p> <p>Packaging SF/Carton..... AH035 - 26.91 sqft/ctn (7.5" x 52") / 19.56 sqft/ctn (12" x 24")</p> <p>Cartons/Pallet..... AH035 - 40 ctn/plt (7.5" x 52") / 66 ctn/plt (12" x 24")</p> <p>Weight/Carton..... AH035 - 16.75 lbs/ctn (7.5" x 52") / 12.17 lbs/ctn (12" x 24")</p> <p>Classification..... ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed</p> <p>Squareness..... ASTM F 2421 - Passes - ±0.10" max</p> <p>Size and Tolerance..... Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot</p> <p>Thickness..... ASTM F386 - Passes - as specified ±0.005"</p> <p>Flexibility..... ASTM F137 - Passes - 1" mandrel</p> <p>Dimensional Stability..... ASTM F2199 - Passes - 0.020"/linear foot max</p> <p>Residual Indentation..... ASTM F1914 - Passes - Average less than 8% maximum single reading 10%</p> <p>Slip Resistance..... ASTM C1028 - Passes - Wet: greater than/equal to 0.5</p> <p>Resistance to Chemicals..... ASTM F925 - Passes - No more than a slight change in surface dylling, surface attack or staining</p> <p>Resistance to Light..... ASTM F1515 - Passes -DE <8</p> <p>Resistance to Heat Flux..... ASTM E649 - Class 1 (>0.45 W/cm2)</p> <p>Smoke Density..... ASTM E662 Part A - Less than 450</p> <p>Installation Method..... AH037 - Glue Down / AH035 & AH036 - Clic</p> <p>Adhesive..... M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive</p> <p>Optional Underlayment..... Mohawk AccuSoundTM -Loose lay - Active Sound-Clic</p> <p>Certification..... FloorScore® Certified</p> <p>Warranty..... Limited 10 Year Light Commercial Warranty Limited 25 Year Residential Warranty</p>
---	--

□	<p>Brand..... Aladdin Commercial</p> <p>Style Name / Number..... Footpath 20 Clic / AH036</p> <p>Product Type..... Luxury Vinyl Tile</p> <p>Overall Gauge..... 4.2 mm</p> <p>Wear Layer..... 20 mil</p> <p>Finish..... M-Force™ Enhanced Urethane Finish</p> <p>Colors Available..... 10 wood / 2 stone</p> <p>Size..... 10 clsr 7.5" x 52" / 2 clsr 12" x 24"</p> <p>Packaging SF/Carton..... AH036 - 26.91 sqft/ctn (7.5" x 52") / 19.56 sqft/ctn (12" x 24")</p> <p>Cartons/Pallet..... AH036 - 40 ctn/plt (7.5" x 52") / 66 ctn/plt (12" x 24")</p> <p>Weight/Carton..... AH036 - 16.75 lbs/ctn (7.5" x 52") / 12.17 lbs/ctn (12" x 24")</p> <p>Classification..... ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed</p> <p>Squareness..... ASTM F 2421 - Passes - ±0.10" max</p> <p>Size and Tolerance..... Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot</p> <p>Thickness..... ASTM F386 - Passes - as specified ±0.005"</p> <p>Flexibility..... ASTM F137 - Passes - 1" mandrel</p> <p>Dimensional Stability..... ASTM F2199 - Passes - 0.020"/linear foot max</p> <p>Residual Indentation..... ASTM F1914 - Passes - Average less than 8% maximum single reading 10%</p> <p>Slip Resistance..... ASTM C1028 - Passes - Wet: greater than/equal to 0.5</p> <p>Resistance to Chemicals..... ASTM F925 - Passes - No more than a slight change in surface dylling, surface attack or staining</p> <p>Resistance to Light..... ASTM F1515 - Passes -DE <8</p> <p>Resistance to Heat Flux..... ASTM E649 - Class 1 (>0.45 W/cm2)</p> <p>Smoke Density..... ASTM E662 Part A - Less than 450</p> <p>Installation Method..... AH037 - Glue Down / AH035 & AH036 - Clic</p> <p>Adhesive..... M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive</p> <p>Optional Underlayment..... Mohawk AccuSoundTM -Loose lay - Active Sound-Clic</p> <p>Certification..... FloorScore® Certified</p> <p>Warranty..... Limited 10 Year Commercial Warranty Limited 25 Year Residential Warranty</p>
---	--

□	<p>Brand..... Aladdin Commercial</p> <p>Style Name / Number..... Footpath 20 Glue Down / AH037</p> <p>Product Type..... Luxury Vinyl Tile</p> <p>Overall Gauge..... 2.5 mm</p> <p>Wear Layer..... 20 mil</p> <p>Finish..... M-Force™ Enhanced Urethane Finish</p> <p>Colors Available..... 10 wood / 2 stone</p> <p>Size..... 10 clsr 7.5" x 52" / 2 clsr 12" x 24"</p> <p>Packaging SF/Carton..... AH037 - 36.22 sqft/ctn (7.5" x 52") / 36.00 sqft/ctn (12" x 24")</p> <p>Cartons/Pallet..... AH037 - 60 ctn/plt (7.5" x 52") / 32 ctn/plt (12" x 24")</p> <p>Weight/Carton..... AH037 - 20.07 lbs/ctn (7.5" x 52") / 38.25 lbs/ctn (12" x 24")</p> <p>Classification..... ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed</p> <p>Squareness..... ASTM F 2421 - Passes - ±0.10" max</p> <p>Size and Tolerance..... Tile ASTM F2055; Plank ASTM F2421 - Passes - ±0.016"/linear foot</p> <p>Thickness..... ASTM F386 - Passes - as specified ±0.005"</p> <p>Flexibility..... ASTM F137 - Passes - 1" mandrel</p> <p>Dimensional Stability..... ASTM F2199 - Passes - 0.020"/linear foot max</p> <p>Residual Indentation..... ASTM F1914 - Passes - Average less than 8% maximum single reading 10%</p> <p>Slip Resistance..... ASTM C1028 - Passes - Wet: greater than/equal to 0.5</p> <p>Resistance to Chemicals..... ASTM F925 - Passes - No more than a slight change in surface dylling, surface attack or staining</p> <p>Resistance to Light..... ASTM F1515 - Passes -DE <8</p> <p>Resistance to Heat Flux..... ASTM E649 - Class 1 (>0.45 W/cm2)</p> <p>Smoke Density..... ASTM E662 Part A - Less than 450</p> <p>Installation Method..... AH037 - Glue Down / AH035 & AH036 - Clic</p> <p>Adhesive..... M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive</p> <p>Optional Underlayment..... Mohawk AccuSoundTM -Loose lay - Active Sound-Clic</p> <p>Certification..... FloorScore® Certified</p> <p>Warranty..... Limited 10 Year Commercial Warranty Limited 25 Year Residential Warranty</p>
---	---

Aladdin™
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com | 800.233.4490

Manufactured in the U.S. with domestic and imported materials

