

Forest Cove






Weathered Barnwood  
Cover: Brazilian Cherry, Refined Look Tile 869 Vivid Palette

## Forest Cove

With a realistic surface texture, Forest Cove LVT features the refined look of premier hardwood with the added advantages of superior durability, tolerance to wet maintenance and ultra-easy installation. Subtle embossing replicates traditional wood species in a collection of popular colors.

### Features

- Diverse color line spanning from traditional to contemporary
- Available in 6" x 36" (6 mil) or 6" x 48" (12 mil) planks
- Protected with a Commercial Grade Urethane
- Optional underlayment - Mohawk AccuSound™
- Ease of installation
- Primary adhesive is Mohawk M700, may use Mohawk MS160 spray adhesive or M95.0 acrylic adhesive
- FloorScore® Certified
- Limited 5 Year Light Commercial Warranty (6 mil)
- Limited 25 Year Residential Warranty (6 mil)
- Limited 10 Year Light Commercial Warranty (12 mil)

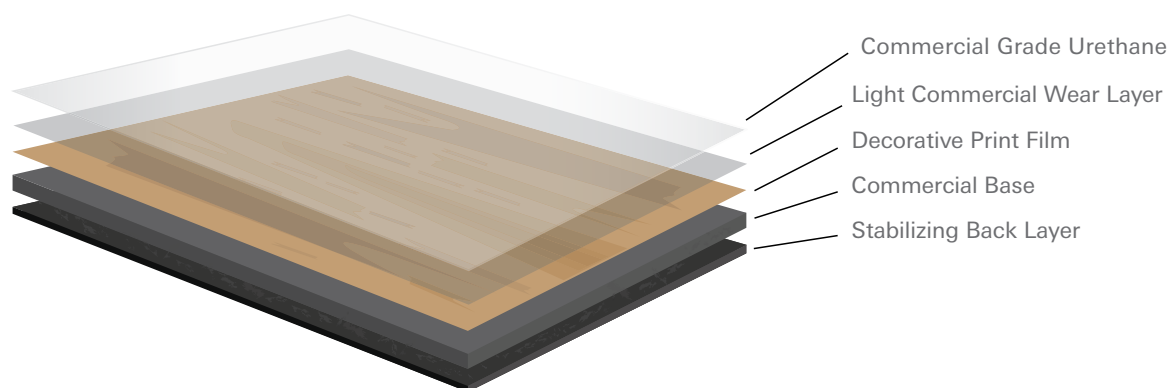



# Specifications

LVT

Brand.....	<b>Aladdin Commercial</b>
Style Name / Number .....	<b>Forest Cove 6mil / AH012</b>
Product Type.....	Luxury Vinyl Tile
Construction .....	Light Commercial Grade Resilient Tile
Gauge.....	.080" (2mm)
Wear Layer .....	6 mil (0.15mm)
Finish.....	Commercial Grade Urethane
Colors Available.....	10
Size.....	6" x 36" (152.4mm x 914.4mm)
Packaging SF/CTN.....	36 st/ctn (3.34m <sup>2</sup> /ctn); 24pcs/ctn; 31.2 lbs/ctn (14.15 lg/ctn) 70 ctn/pallet, 2520 sq. ft pallet
Classification.....	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness .....	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance .....	ASTM F2055 - Passes - ±0.016 in. per linear foot
Thickness .....	ASTM F386 - Passes - as specified ±0.005 in.
Flexibility.....	ASTM F137 - Passes - ≤ 1.0 in., no crack or breaks
Dimensional Stability .....	ASTM F2199 - Passes - 6 Hours at 180° F 0-12% (0.020 in. per linear foot)
Residual Indentation.....	ASTM F1914 - Passes - Average less than 8%
Slip Resistance.....	ASTM C1028 > .5
Resistance to Chemicals .....	ASTM F925 - Passes - No Change or Slight Change
Light Resistance .....	ASTM F1515 - Passes - ΔE ≤ 8
Heat Resistance .....	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux.....	ASTM E648 - Passes - ≥ 0.45 watts/cm <sup>2</sup> , Class 1
Smoke Density.....	ASTM E662 - Passes - < 450
Installation .....	Glue Down
Adhesive .....	Mohawk M700 Pressure Sensitive, MS160 Spray or M95.0 Acrylic
Optional Underlayment .....	None required, but when needed for acoustics, use Mohawk AccuSound™
Certification .....	FloorScore® Certified
Warranty.....	Limited 5 Year Light Commercial Warranty Limited 25 Year Residential Warranty

LVT

Brand.....	<b>Aladdin Commercial</b>
Style Name / Number .....	<b>Forest Cove 12mil / AV011</b>
Product Type.....	Luxury Vinyl Tile
Construction .....	Light Commercial Grade Resilient Tile
Gauge.....	.080" (2mm)
Wear Layer .....	12 mil (0.3mm)
Finish.....	Commercial Grade Urethane
Colors Available.....	10
Size.....	6" x 48" (152.4mm x 1219.2mm)
Packaging SF/CTN.....	36 st/ctn (3.34m <sup>2</sup> /ctn); 18pcs/ctn; 23.4 lbs/ctn (14.15 lg/ctn) 70 ctn/pallet, 2520 sq. ft pallet
Classification.....	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness .....	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance .....	ASTM F2055 - Passes - ±0.016 in. per linear foot
Thickness .....	ASTM F386 - Passes - as specified ±0.005 in.
Flexibility.....	ASTM F137 - Passes - ≤ 1.0 in., no crack or breaks
Dimensional Stability .....	ASTM F2199 - Passes - 0.15% max (0.020 in. per linear foot)
Residual Indentation.....	ASTM F1914 - Passes - Average less than 8%
Slip Resistance.....	ASTM C1028 > .5
Resistance to Chemicals .....	ASTM F925 - Passes - No Change or Slight Change
Light Resistance .....	ASTM F1515 - Passes - ΔE ≤ 8
Heat Resistance .....	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux.....	ASTM E648 - Passes - ≥ 0.45 watts/cm <sup>2</sup> , Class 1
Smoke Density.....	ASTM E662 - Passes - < 450
Installation .....	Glue Down
Adhesive .....	Mohawk M700 Pressure Sensitive, MS160 Spray or M95.0 Acrylic
Optional Underlayment .....	None required, but when needed for acoustics, use Mohawk AccuSound™
Certification .....	FloorScore® Certified
Warranty.....	Limited 10 Year Light Commercial Warranty

**Aladdin**<sup>™</sup>  
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit [www.mohawkflooring.com](http://www.mohawkflooring.com) | 800.233.4490



Up to 10,000 sq. ft. available within 10 business days or less

