

Visionary Collection

Face Time, Hand Cast, Layer Up, Stoney Strokes, Urbane Chip





Urbane Chip 959 Sensation, Transforming Spaces 521 Visual Edge
Cover: Face Time 848 Retreat, Stoney Strokes 774 Linen

Visionary Collection

R E S I L I E N T S H E E T

Visionary resilient sheet flooring is designed to meet the needs of light commercial and residential spaces. The soft colors and warm textures of wood, stone and linen visuals help create a calming environment for a variety of settings.

With 5 styles and 16 colors, Visionary coordinates perfectly with other Aladdin Commercial products including: Broadloom, Carpet Tile and LVT.

Aladdin Commercial offers comprehensive flooring solutions that are created specifically for commercial interiors featuring beautifully designed products, superior performance and exceptional service.

broadloom • carpet tile • luxury vinyl tile • resilient sheet







Handcast 773 Mottle



Layer Up 555 Tranquil




Face Time 848 Retreat, Stoney Strokes 774 Linen

Visionary Collection

Visionary Collection resilient sheet flooring by Aladdin Commercial, features five soft, organic visuals that are textile-inspired along with natural wood grain looks that create a warm and comforting environment. Constructed for light commercial and residential spaces offering excellent performance and durability, including our M-Force 1™ Enhanced Urethane Finish for excellent wear and stain resistance, along with a no-polish option for lower maintenance costs.

Features

- Heterogeneous Construction
- 6' & 12' widths
- 20 mil wear layer
- .080" (2mm) overall thickness
- M-Force 1™ Enhanced Urethane Finish
- Specification ASTM F-1303
- Seams can be cold welded or heat welded
- Install with M95.0 or MS160 Spray Adhesive
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- Limited 25 Year Residential Warranty
- Made in America

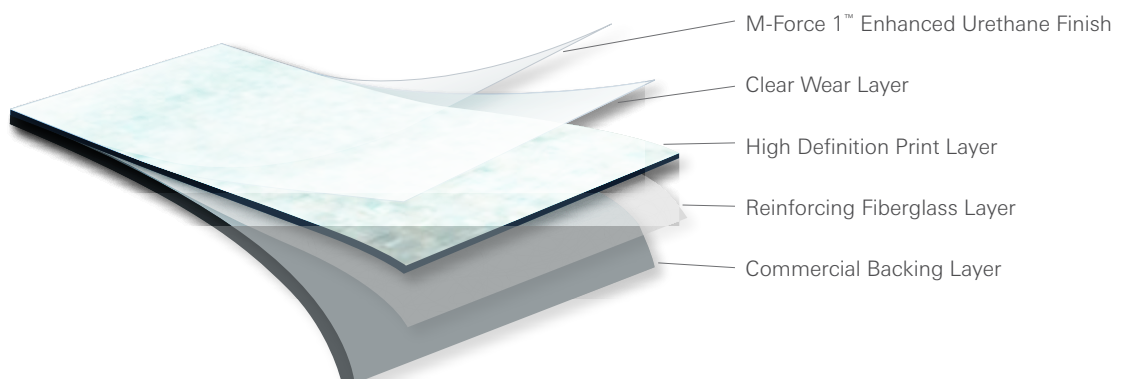

Visionary features a 20 mil commercial wear layer with M-Force 1™ Enhanced Urethane finish offering excellent wear and stain resistance and polish-optional for cost-effective maintenance.

Specifications

RESILIENT SHEET	Brand.....	Aladdin Commercial
	Collection Name.....	Visionary Collection
	Style Name / Number	Face Time C2028, Hand Cast C2029, Layer Up C2027, Stoney Strokes C2031, Urbane Chip C2030
	Product Type.....	Resilient Sheet
	Construction	Heterogeneous Light Commercial
	Sizes	6' and 12'
	Overall Gauge080" (2.0mm)
	Wear Layer	20 mil (0.5mm)
	Finish.....	M-Force 1™ Enhanced Urethane
	Roll Size (Min. - Max.)	50' min. - 65' max.
	Pattern Repeat.....	Hand Cast (47.244" X 39.173"): 773, 785 (1/2 drop)
		Layer Up (39.37" X 39.37"): 555, 771 (1/2 drop)
		Face Time (39.37" x 39.17"): 131, 232, 848, 949 (19.69" drop)
		Stoney Strokes (39.37 x 39.37): 559, 774, 995 (1/2 drop)
		Urbane Chip (39.37" X 39.37"): 576, 769, 959 (no drop)
	Installation.....	Do not reverse sheet for installation
	Recommended Adhesive	Mohawk M95.0 Adhesive or MS160 Spray Adhesive
	Seaming Methods.....	Cold Weld or Mohawk Solid Color Weld Rods
	Construction.....	Commercial Grade Heterogeneous Resilient Sheet
		Non-ortho Phthalate Construction
	Classification	ASTM F - 1303 Type 1, Grade 1, Class A
	Flexibility	ASTM F - 137 - Passes 6 mm Mandrel
	Wear Layer Thickness	ASTM F - 410 - .55mm avg.
	Thickness.....	ASTM F - 386 - Passes - Nominal Å} 0.005 in.
	Static Load Limit.....	ASTM F - 970 - Passes - Modified - 1,500 psi
	Coefficient of Friction	ASTM C - 1028 - Passes
	Dynamic Rolling Load	ASTM F - 2753 - 500 cycles no change
	Residual Indentation.....	ASTM F - 1914 - Passes - Average less than 8%
	Resistance to Chemicals	ASTM F - 925 - Passes
	Resistance to Light.....	ASTM F - 1515 - Passes - ΔE ≤ 8
	Resistance to Heat	ASTM F - 1514 - Passes - ΔE ≤ 8
	Electrostatic Propensity.....	AATCC 134 - avg. .5 kv Positive
	Critical Radiant Flux.....	ASTM E - 648 - Passes - ≥ 0.45 watts/cm., Class 1
	Smoke Density.....	ASTM E - 662 - Passes
	Warranty.....	Limited 10 Year Light Commerical Warranty
		Limited 25 Year Residential Warranty

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.mohawkflooring.com 1 800.233.4490

