





Cultivation Collection

RESILIENT SHEET

Aladdin Commercial makes it easy to personalize your commercial space. With coordinating carpet tile, broadloom, LVT, and resilient sheet styles; our product lines offer the design freedom needed to create unique interiors.

Cultivation resilient sheet flooring is designed to meet the needs of light commercial and residential spaces. The soft, organic visuals featuring both stone and natural wood grain looks create a warm and comforting environment for a variety of settings.

With seven visuals and a total of 16 colors, Cultivation coordinates perfectly with other Aladdin Commercial products including: Broadloom, Carpet Tile and LVT.












Cultivation Collection

Cultivation resilient sheet flooring by Aladdin Commercial, features seven soft, organic visuals featuring both stone and natural wood grain looks that create a warm and comforting environment. Constructed for light commercial and residential spaces offering excellent performance and durability, including an Enhanced Urethane Finish for superior wear and stain resistance, along with a no-polish option for lower maintenance costs.

Features

- Heterogeneous Construction
- 13'2" (4m) width
- 16 mil wear layer
- .085" (2.18 mm) overall thickness
- Enhanced Urethane Finish
- Classification ASTM F-1303

- Seams can be cold welded
- Install with M95.0 or MS160 Spray Adhesive
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- 25 Year Residential Warranty
- Made in America

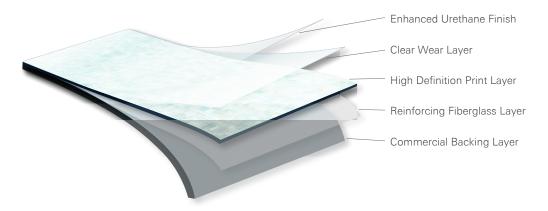

Cultivation features a 16 mil commercial wear layer with Enhanced Urethane Finish offering excellent wear and stain resistance and polish-optional for cost-effective maintenance.

Specifications

ĽΘ

RESILIENT SHEET

Brand	Aladdin Commercial
Collection Name	Cultivation Collection
Style Name / Number	Cultivation C2050
Product Type	Resilient Sheet
Construction	LIGHT Commercial Grade Heterogeneous Resilient Sheet,
Sizes	13' 2"
Overall Gauge	2.18 MM
Wear Layer	16 mil
Finish	Enhanced Urethane
Roll Size (Min Max.)	
Pattern Repeat	78.74" x 47.24" / 39.37" x 39.37" / 39.37" x 47.24" / 78.74" x 39.37" / 78.35" x 39.37
Installation	Glue Down
Recommended Adhesive	Refer to Website for current adhesives
Seaming Methods	Cold Weld
Construction	Non-ortho Phthalate Construction
Classification	ASTM F - 1303 Type 1, Grade 2, Class A
Flexibility	ASTM F137 - Passes
Rolling Load	ASTM F2753 - No change
Residual Indentation	ASTM F1914 - Passes
Resistance to Chemicals	ASTM F925 - Passes, No Change
Resistance to Light	ASTM F 1515 - E < 8.0
Resistance to Heat	ASTM F 1514 - E < 8.0
Electrostatic Propensity	AATCC 134 - Less than 3.5 kV
Critical Radiant Flux	ASTM E648 - Meets, Class 1
Smoke Density	ASTM E662 - Meets, 450 or less
Warranty	Limited 10 Year Light Commercial Warranty
•	- ,



Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.


Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

For current and complete specifications please call tech support at 888-387-9881 or visit www.AladdinCommercial.com I 800.233.4490

CULTIVATION - C2050



CULTIVATION - C2050

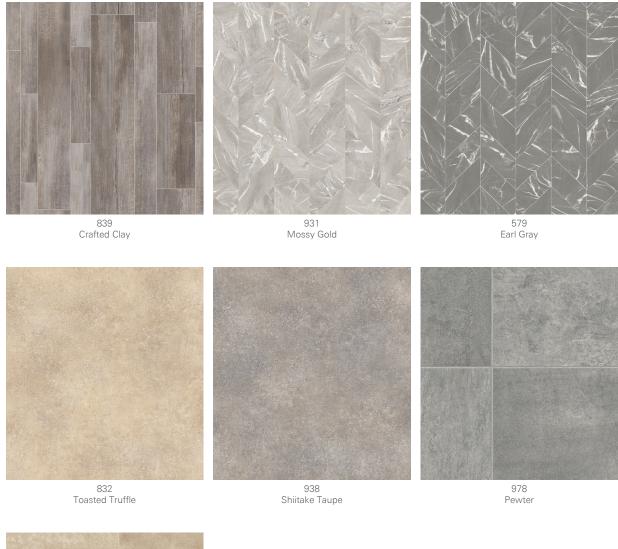



722 Baguette