




Round Tread with Visual Strip, Round Tread & Riser, Landing Tile | Suede 846 Cover: Hammered Tread with Visual Strip, Hammered Tread & Riser, Landing Tile | Twilight 002

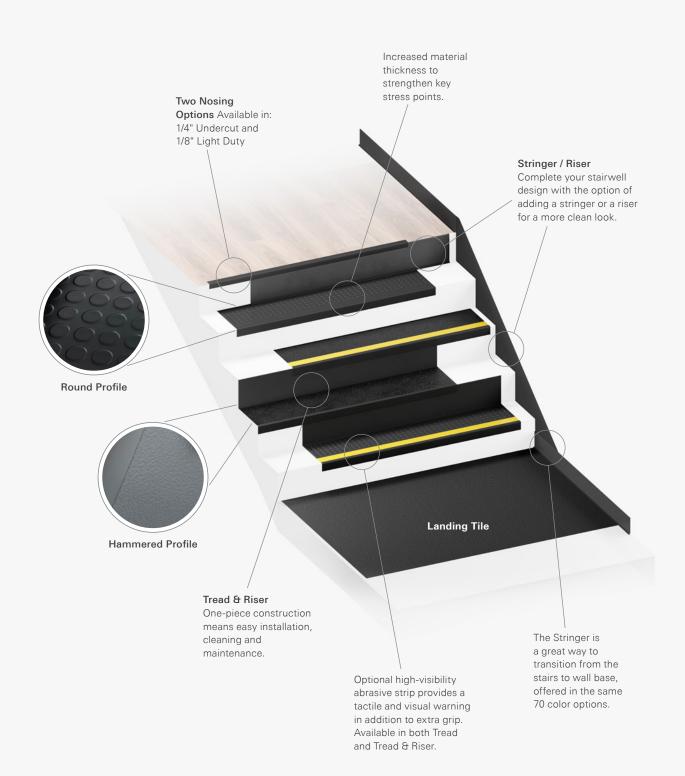

### RUBBER STAIR TREADS


Choose 12.5" Regular Tread or 20" Integrated Tread/Riser. Available in 48" and 72" lengths. Round and Hammered Finishes available with Standard Square Nose. All profiles available with or without visually impaired strips.

### VISUALLY IMPAIRED STRIP

Optional high-visibility abrasive strip provides a tactile and visual warning in addition to extra grip. Black visually impaired strip available on all stair tread colors, except 002 Twilight which is available with yellow.

## STANDARD SQUARE NOSE

High-quality rubber with extreme durability and ridges to aid in shoe grip.

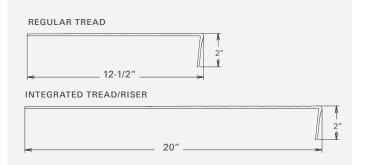


	TREAD	TREAD & RISER	TREAD WITH VISUAL	TREAD & RISER WITH VISUAL
HAMMERED				
	AH059	AH060	AH061	AH062
ROUND				
	AH063	AH064	AH065	AH066

### RISER AH067

0.080"


#### **RESILIENT LANDING TILES**

AH068 Available in 18" squares



24' x 10 1/4" with 3/8" toe x


AH057 1/8" LIGHT DUTY COMMERCIAL NOSING




AH058 1/4" UNDERCUT NOSING

## Stairwell Finishes


The Stringer/Riser combo is a 24' x 10 1/4" piece that can be used as either a Stringer on a wall transitioning to your wall base or a Riser to pair with Treads. Both applications can be achieved by trimming the material to fit your unique design.

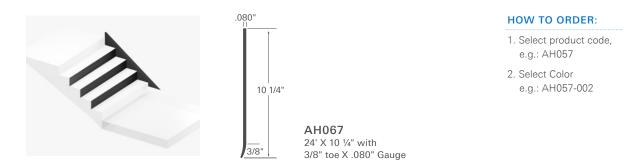

Stairwells are the #1 trip hazard in every building. Selecting the correct nosing can reduce the chance of accidents, injury and unnecessary cost.



AH057 1/8" LIGHT DUTY NOSING



AH058 1/4" UNDERCUT NOSING



AH047 COVE STICK AVAILABLE IN NEUTRAL COLOR ONLY

# Landing Tiles

#### Product: AH068

Composition: Homogeneous Solid Vinyl

Size: 18" × 18"

Thickness: 1/8" (3 mm)

Installation: Glue Down

Slip Resistance	ASTM D2047 ≥ 0.5
Resistance to Heat	ASTM F1515 - $\Delta E \le 8$
Resistance to Light	ASTM F1514 - $\Delta E \le 8$
Critical Radiant Flux	ASTM E648 ≥ 0.45
Smoke Density	ASTM E662 < 450

At Aladdin Commercial we believe in providing project solutions that are easy to select and readily available. Tailored Trim is a complete portfolio of free-to-ship accessories for all your flooring installation and finishing needs. The program is offered in 14 QuickShip colors that coordinate perfectly with our full suite of soft and hard surface products.

# Wall Base

Seamlessly coordinate your wall base and Aladdin Commercial floor covering from our variety of QuickShip wall base offerings.

#### **AVAILABLE IN**

- Rubber
- Vinyl
- 4" or 6" in height
- Coved or straight
- 4' lengths or 96' &
- 120' rolls
- 1/8" gauge
- .080" gauge (4" Cove vinyl lengths only)

# Installation Accessories


Add a functional finishing touch to your coordinated color scheme with Aladdin Commercial installation accessories. Proprietary Rubber formulations are shrink and crack-proof, and won't fade, even in direct sunlight.

#### **CHOOSE FROM**

- Universal Transitions
- Adaptors
- Reducers
- Cove Stick



# **Color Options**

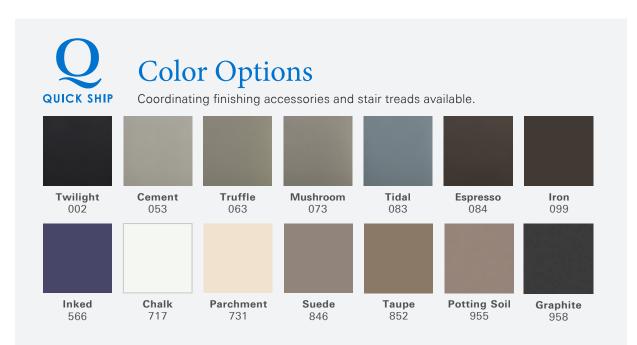

# Specifications

STAIR TREADS

Brand Style Name / Number	
Size Treads Treads with Risers	Length: 48" (1.219m) / 72" (1.829m) Width: 12.5" (317.5mm) Nosing Depth: 2" (50.8mm) ADA compliant Nosing Radius: 1/4" (6mm) ADA compliant Length: 48" (1.219m) / 72" (1.829m) Width: 20" (508mm) Nosing Depth: 2" (50.8mm) ADA compliant Nosing Radius: 1/4" (6mm) ADA compliant
Overall Gauge	.125" (1/8")
Ouickship Made to Order	14 56
Classification Resistance to Chemicals Resistance to Light Resistance to Heat Critical Radiant Flux Smoke Density Slip Resistance Hardness	ASTM F2169 Resilient Stair Treads Type TP, Class 2 Group 1 & 2 (Visually Impaired Safety Strip) ASTM F925 - Passes, No More Than Slight Changes ASTM F1515 - Passes, $\Delta E = 4.2$ ASTM F1514 - Passes, $\Delta E = 4.8$ ASTM F1514 - Passes, $\Delta E = 4.8$ ASTM E648 - $\geq 0.45$ ASTM E662 - < 450 ASTM D2047 SCOF $\geq 0.64$ ASTM D2240 95 Shore A
Certification	FloorScore <sup>®</sup> Certified

For detailed warranty, installation and adhesive information visit mohawkgroup.com