


Large & Local is an innovative enhanced resilient tile featuring eight clean wood visuals with minimal graining and eight rustic visuals with coarse graining and circle sawn texture. With a natural color range and matte surface reminiscent of European hand-oiled finishes, these versatile tiles are well-suited for any interior, from modern to traditional. The large planks are extra-wide and long, 9.25" x 59", and each color is named after a local mountain gap or destination located close to our North Georgia resilient production facility.












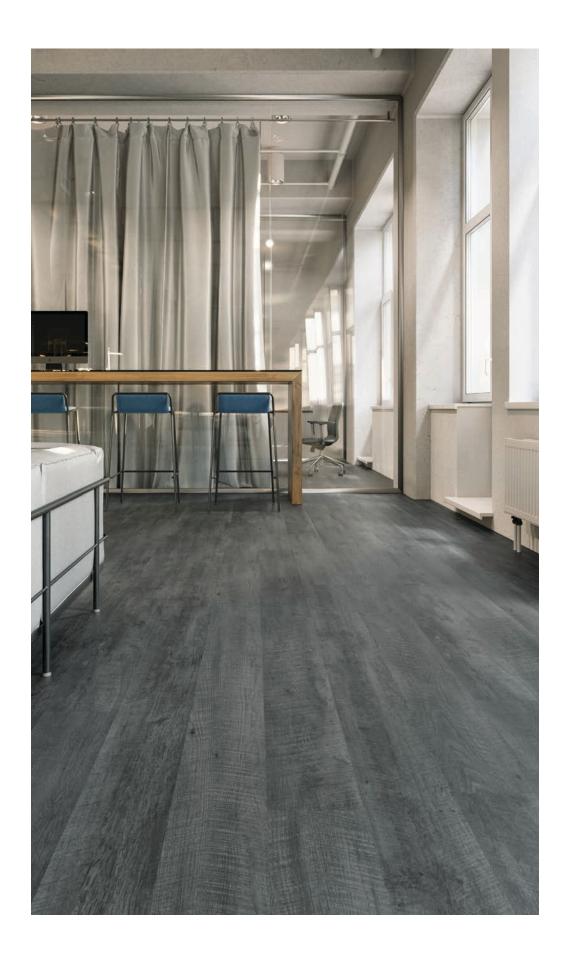



Large & Local Colorways




Textural Effects COORDINATING PLANK & BROADLOOM

Textural Effects aims to activate our senses and brings a sense of tactility to our day. The desire for soft groundcover visuals such as linen textiles and organic patterns are met with tactility and comfort to sustain us in all types of spaces. All Textural Effects styles provide visual and tactile contrast when used with other finishes that have a smooth surface or high gloss, and they look especially warm and rich with wood hard surfaces.

FEATURES

- 12" x 36" Carpet Plank available in two styles: Tactile Infusion and Thematic Thread
- Broadloom available in two styles: Moss Moderne and Matte Finish
- Broadloom patterns also available as area rugs up to 12' x 45'
- Duracolor® Tricor Premium Nylon
- NSF/ANSI 140 Gold
- Carpet Plank is Living Product Challenge Petal Certified
- Declared Red List Free, EPD and HPD

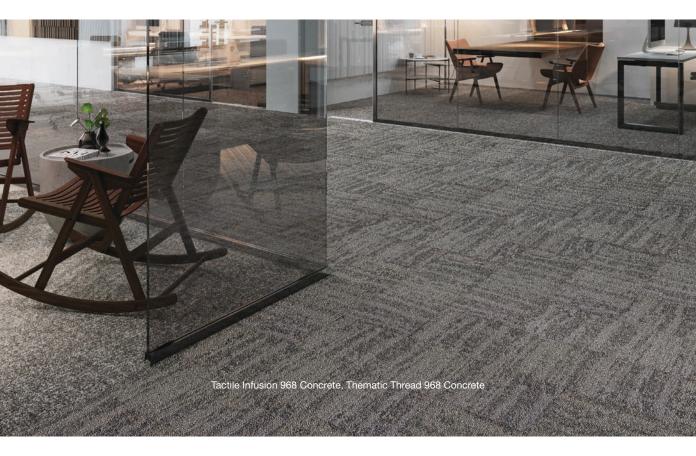



Specifications

Large & Local C0128

DESIGN

9.25" W x 59" L (234.95 mm x 1498.6 mm) Size

Overall Gauge

20 mil (0.5mm) Wear Layer

M-Force™ Ultra Enhanced Urethane Finish

Colors Available 16 Colors

Packaging 18.95 sq. ft. per carton / 5 pcs per carton / 17 lbs per carton

*For detailed warranty, adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction Commercial Grade Dryback Resilient Tile

Classification ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed

Squareness ASTM F 2421 - Passes - ±0.10" max Size and Tolerance ASTM F2421 - Passes - ±0.16"/linear foot ASTM F386 - Passes - as specified ±0.005" Thickness

ASTM F137 - Passes - 1" mandrel Flexability Dimensional Stability ASTM F2199 - Passes - 0.020"/linear foot max

ASTM F970 - Passes, modified at 1000 psi Static Load Limit

Residual Indentation ASTM F1914 - Passes - Average less than 8% maximum single reading 10%

Resistance to Chemicals ASTM F925 - Passes - No more than a slight change

Resistance to Light ASTM F1515 - Passes -ΔE < 8 Resistance to Heat ASTM F1514 - Passes - $\Delta E < 8$ Critical Radiant Flux ASTM E648 - Class 1 (>0.45 W/cm2) Smoke Density ASTM E662 Part A - Less than 450

SUSTAINABILITY

Certification FloorScore® Certified

Manufacturing Location USA

